ODL-3-340180-342SB0

Optidrive Elevator Core VFD Datasheet

7.5 kW (10 HP), 18 A, 380-480 V, 3PH IP20 Variable Frequency Drive with EMC Filter

Input Ratings

Supply Voltage	380-480 V
Input Phases	3
Supply Current Continuous	A
Supply Fuse or MCB (Type B)	A

Output Ratings

Motor Output Rating	7.5 kW (10 HP)	
Output Voltage	0 – Supply Voltage	
Output Current	18 A	

Cable Information

Max Supply Cable Size	_
Max Motor Cable Size	_
Max Motor Cable Length	100 m (328 ft)

Factory Build Options

EMC Filter	Internal EMC
Brake Transistor	Internal
Enclosure	IP20
Display	LED
PCB Coating	Full Conformal

C E 🖫 🔊



Dimensions

Size	3
Height	261 mm (10.28 in)
Width	131 mm (5.16 in)
Depth	207 mm (8.15 in)
Weight	3.72 kg (8.2 lbs)
Fixings	4xM5

Packaged Dimensions


Height	242 mm (9.53 in)
Width	165 mm (6.5 in)
Depth	364 mm (14.33 in)
Weight	4.34 kg (9.57 lbs)



Buy this drive or get more information Find your local sales partner on invertekdrives.com



The following document provides a summary of the Elevator Core drive's compliance, protection and feature set supported.

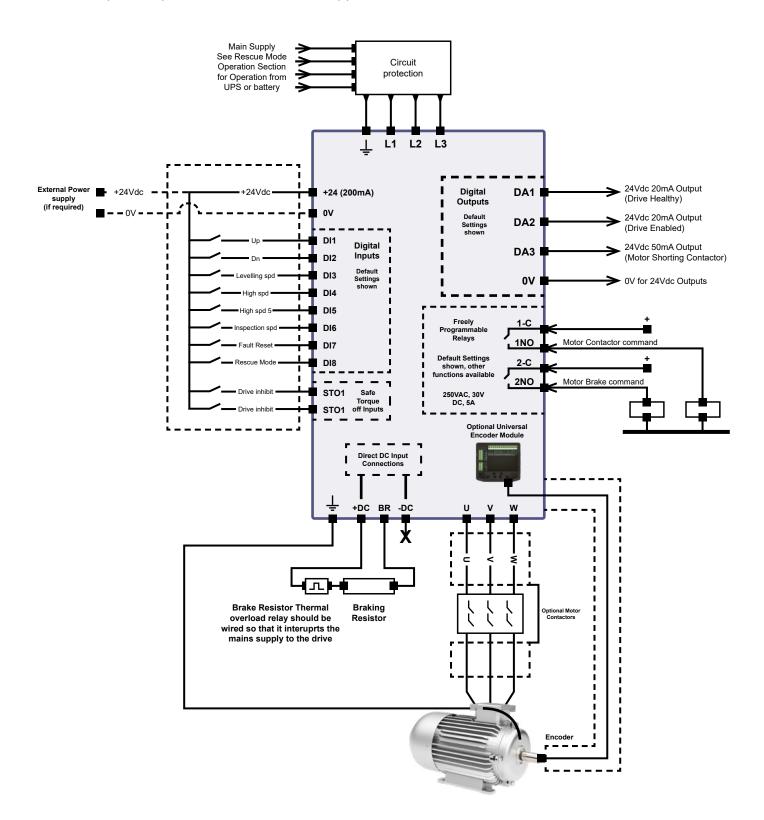



Buy this drive or get more information Find your local sales partner on invertekdrives.com



OPTIDRIVE[™] elevtor core


Drive Specification & Features


Cartification Product certification UL 61800-52 [Functional Safety] Softwares For large Softwares For						
Encode production of the Society	Compliance and Certifications	European product certification EN 61800-5-1	Software	Elevator industry menu structure		Minimum Temperature -10°C
Europe DN: 10:003 (200) Painting of the Paint Pain		European product certification UL 61800-5-2 (Functional Safety)		200% overload capability		
IBA gradient (IIII BBASC) IBA classical (IIII BBASC) IBA classical (IIIII BBASC) IBA classical (IIIIII BBASC) IBA classical (IIIIII BBASC) <td< td=""><td></td><td></td><td></td></td<>						
Biolegesting Biolegesting<				• •		
Park Selb Subges processing Selb Subges 3000 Self Self Subges Self Self Self Self Self Self Self Self						
Interfacts is 10 ¹⁰ Anigen and Bigle and DPP 10pd 1000000 Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) Science Markening (Expending Anigeness) Pice Markening (Expending Anigeness) Science Markening (Expending Anigeness) </td <td></td> <td></td> <td>1.1.1</td> <td rowspan="5"></td> <td></td>				1.1.1		
Balance Marked by Balance Solutions Income sequence of comparison of compa		*certification by TUV				
White Affairs of each way way is a log of an information of the ansate of the						1000m) Non-UL Approved 4000 m
3.2014 variances jui minute Interpretation (Interpretation (Interpreta		Without Motor contactor conformity using Safe Torque Off		match elevator controller.		
Base of Control Count routing Intel State St		50:2014 *certification by Lift Institute		Trip log time stamping		
Result Registering Results (inclusion structure) Radia (inclusion struc	Elevator Motor	Open and Closed Loop Geared motors		Fault detection suppression.		Long lite tans
doi: Alignation Alignation Balagement Second Construction Alignation Construction Construction Construction Constrelevenenenenenenee Construction	Control	Closed Loop Gearless motors		Built in flight recorder		
Back All code lands regarded management Back Code Code and Solution Solution Back Code Code and Solution Solution Back Code Code and Solution Solution Back code and solution solution Back code and solution <td></td> <td></td> <td>Analog, Binary, Priority control, Control word</td> <td></td> <td></td>				Analog, Binary, Priority control, Control word		
Air: Contor: Claugi ading time Binding and control Air: Contor: Claugi ading time Binding and control Binding and control Binding and				Analog follower mode.		
Number Number Number Number Num Number Number <td< td=""><td></td><td></td><td></td><td>User adjustable Contactor sequencing</td><td></td><td></td></td<>				User adjustable Contactor sequencing		
Advancement Researce Advancement Maine indemonstration Advancement Maine	Elevator Drive Protection			Full travel profile setting and user stop profile configura on		
Advance Advance Advance <	The following					
Bala mail Fund log Bala mail Fund log Bala mail Fund log More insort integrations in all materia. Fund log and Ecodit regred feedback files. Bala mail Fund log and Ecodit regred feedback files. Data materia protection. Fund log and Ecodit regred feedback files. Data materia protection. Fund log and Ecodit regred feedback files. Data materia protection. Fund log and Ecodit regred feedback files. Data materia protection. Fund log and Ecodit regred feedback files. Data materia protection. Fund log and feedback files. Data materia protection. Fund log and feedback files. Data materia protection. Fund log and feedback files. Data materia. Fund log and feedback files. Data materia. Fund log and feedback files. Materia. Fund log and feedback files. Data materia. Fund log and feedback files. Data materia. Fund log and feedback files. Contreleger	protection and monitoring features					
Mater ident ignet spreaktion in all itatention. Advance interpreaktion in all itatention. Mater ident ignetification in all itatention. Advance interpreaktion. Note ident ignetification interpreaktion in all itatention. Advance interpreaktion. Note ident ignetification interpreaktion in all itatention. Advance interpreaktion. Note ident ignetification interpreaktion. Representation. Note ident ignetification. Representignetification.	are built into the Optidrive Elevator					
Motor Harmal overload protection.Instel Specific Projection Control ColOutput places tas detection.Sinoch Start Instelon.Over veloge on DC busGenet Prior operationOver veloge on DC busPrior to Prior operationInput Phase Instelonce DC Bus Ripple)Filter OperationOver veloge on DC busPrior to Prior operationInput Phase Instelonce DC Bus Ripple)Filter OperationOver veloge on DC busPrior to Prior operationOver veloge on DC busPrior to Prior operationInput Phase Instelonce DC Bus Ripple)Filter OperationOver veloge on DC busPrior to Prior OperationOver veloge on Prior Operation For macroe operation (Light Node Detection).Prior Prior Node OperationPrior Prior OperationPrior Prior Node OperationPrior Prior N	Core drive as standard.					
Quipp place loss devictors.Seconds Seconds (Inviting power connected of a loss devictors).Seconds Seconds (Inviting power connected of a loss devictors).Quine values on DC bosGuine Values (Inviting Power Connected of a loss devictors).Guine Values (Inviting Power Connected of a loss devictors).Hould water and part of a loss devictors.Guine Values (Inviting Power Connected of a loss devictors).Guine Values (Inviting Power Connected of a loss devictors).Hould water and for a loss devictors.Guine Values (Inviting Power Connected of a loss devictors).Guine Values (Inviting Power Connected of a loss devictors).Hould water and for a loss devictors.Guine Values (Inviting Power Connected of a loss devictors).Guine Values (Inviting Power Connected of a loss devictors).Hould water and for a loss devictors.Guine Values (Inviting Power Connected of a loss devictors).Guine Values (Inviting Power Connected of a loss devictors).Hould water and for a loss devictors.Guine Values (Inviting Power Connected of a loss devictors).Guine Values (Inviting Power Connected of a loss devictors).Hould water and for a loss devictors.Guine Values (Inviting Power Connected of a loss devictors).Guine Values (Inviting Power Connected of a loss devictors).Hould water and for a loss devictors.Guine Values (Inviting Power Anvites Values (Inviting Power Anvites Values Values (Inviting Power Anvites Values Values (Invite) Values (Invite).Hould water and for a loss devictors.Guine Values (Invite).Guine Values (Invite).Hould water and for antice of loss devictors.Guine Values (Invite).Guine Values (Invite).Hould water and for antice of loss devictors.						
Provinces populating protocols (mino power connected locations convolugion DC busPerceptionInder voltage on DC busPerception ConstructionsInder Voltage ConstructionsPerception ConstructionsInder Voltage On DC busPerception Constructio				Smooth Start function.		
B driv outgoinSear Flace OperationOr voltage on DC bas*Iment of Boor operationInder voltage on DC bas/Iment of Boor operationInput Phase initialized DC Bas Ripple)/Iment of Boor operationInder temperature/Iment rememorationInder temperature/Iment rememorationInder temperature boor High/Iment rememorationInd				Creep to Floor operation		
Under vologe on DC boxImage in the form of period in the speed and current loop gainsIsput phase loss tripCurrent loop and speed feedback filtersIore temperatureIore temperatureIorder temperatureIore vologe Softery operation from 32V/dc up to drive rated VoloIorder temperatureGravity Door speed Softery operation from 32V/dc up to drive rated VoloIorder temperatureGravity Door speed Softery operation from 32V/dc up to drive rated VoloIorder temperatureGravity Door speed Softery operation from 32V/dc up to drive rated VoloIorder temperatureGravity Door speed Softery operation from 32V/dc up to drive rated VoloIorder temperatureGravity ModeIorder Filt Softer Softer Operation from 32V/dc up to drive rated VoloGravity ModeIorder Filt Softer Softer Operation from 32V/dc up to drive rated VoloGravity ModeIorder Filt Softer Softer Softer OperationFilt Softer OperationIorder Filt Softer Softer Softer Softer OperationFilt Softer OperationIorder Filt Softer Softer Softer Softer OperationFilt Softer OperationIorder Filt Softer Softe				Short Floor Operation		
Input phase loss tripCurrent loop and speed net count leopads.Input Phase imbolance (DC Bus Ripple)Init Addition gendsOver temperatureInit Addition from the count of the cou		Over voltage on DC bus		*Direct to Floor operation		
Ippe Plane loss tripCurren loop and speed feedback filtersIppe Plane insolance [IPC Bus Ripple]Ipte AdjuatmentsOver temportureLow voltage Battary operation from 30/dic up to drive rated VoltInder temportureControl agenation to HighAmbien Temportures to HighControl agenation to HighMoles temportures to HighGrivity ModeMotor PC monitoring.Grivity ModeMotor PC monitoring.Grivity ModeControl signal loss detectionForspeed Governor TealControl signal loss detectionTravel CounterStaff Orque of Fricuiti Error detectionGrivity ModeAutors France detectionTravel CounterRotor Parage for CounterAns-Sol ProtectionStaff Orque of Fricuiti Error detectionGriver agenation agenati		Under voltage on DC bus		Multiple speed and current loop gains		
Input Rease insolations (PC Russ Rippe)Ier AdjustmentsOver temperatureNovologe Battery operation from 3404c up to drive rated VolaInder temperature to HighIood measurement for scase operation (light Load Detection) cristif, Power circuit.Mabier Temperature to HighControl Scale RelationsMotor FU membershyGront Scale RelationsMotor FU membershyGront Scale RelationsMotor KY monitoring.Control Scale RelationControl Scale RelationForeir Gront ScaleMotor Charling InputForeir Gront ScaleControl Scale RelationForeir Gront ScaleRelation Kontrol RelationsForeir Gront ScaleRelation Kontrol RelationsForeir Gront ScaleRelation RelationsForeir Gront ScaleRelation RelationsForeir Gront ScaleRelation RelationsForeir Gront ScaleRelations RelationsForeir Gront ScaleRelations RelationsForeir Gront ScaleRelationsForeir Gront ScaleRelations <t< td=""><td rowspan="2"></td><td>Input phase loss trip</td><td></td><td></td><td></td></t<>		Input phase loss trip				
Over emparatureInvestmentant on SMAC up to drive rote of VAC up to drive rote VAC up to drive rote of VAC up to drive rote of		Input Phase imbalance (DC Bus Ripple)				
Under temperatureUnder temperatureInder temperatureIn		Over temperature				
Ambient Temperature too High I Graque test, lad run memory. Multiple on-board Hermistory, Within Power device, Control circuit. Power circuit. Gravity Mode Motor KIY monitoring. User Unit Selections Ator KIY monitoring. Forder Selections Control signal loss detection Forder Control signal loss detection Communications loss Foult detection Forder Control signal loss detection Selection Fordule detection Forder Selection Autotume Error detection Guipur Phose Selections Autotume Error detection Collars selections support of regenerative units Robe Release Monitoring Poweer Counter Robe Release Monitoring Lockout Forder Fredback. Hard It certifien Gedback. Robus Commis fault Poweer Counter Andotase Encoder faults Poweer Counter Robus Release Monitoring Lockout Poweer Counter Robus Commis fault Forder Fredback shaft copy, simulated Encoder output. Robus Release Monitoring Lockout		Under temperature				
Number of rocultNumber of each of the sectionUser Unit SelectionsMotor PIC monitoring.Overspeed Governor TestMotor KTY monitoring.External trip inputControl signal loss detectionAnti-Sall ProtectionControl signal loss fault detectionTrevel CounterCommunications loss Fault detectionPrevear CounterGord Torque off circuit Error detectionOutput Phase Sequence swap.Encoder Feedback FoultsOutput Phase Sequence swap.Factory Defoult parameters have been loadedOutput Phase Sequence swap.Factory Defoult parameters have been loadedUniversal Encoder module.Brake Release MonitoringOutput Phase Sequence swap.Moduus comms faultOutput Phase Sequence swap.Moduus comms faultOutput Phase Sequence swap.Roceder sing fault operationOutput Phase Sequence swap.Roceder sing fault parameters have been loadedIniversal Encoder module.Brake Release MonitoringOutput Phase Sequence swap.Moduus comms faultIniversal Encoder module.Roceder sing fault parameters have been loadedEncoder sing back detection.Brake Release Monitoring LockoutIniversal Encoder module.Roceder diffection stripEncoder diffection swap.Roceder freedback shaft copy, simulated Encoder output.Roceder freedback shaft c		Ambient Temperature too High				
Modor PIC monitoring.Overspeed Governor TestMotor KTY monitoring.Fatronal trip inputControl signal loss detectionFatronal CourterControl signal loss fault detectionTricel CourterRoads Torque off circuit Error detectionUer customisable Cooling Fan CourterRoadser Feedback FaultsOutput Phase Sequence swap.Rotor Default parameters have been loadedOutput Phase Sequence swap.Rotor Reedsex Monitoring LockoutFeeder support of regenerative unitsRotor Reedsex Monitoring LockoutFeeder support of regenerative unitsRotor Strike Release Monitoring LockoutFeeder supportMadus comms faultFeeder supportRotor Strike TimeFeeder Strike TimeRotor Strike TimeFeeder Strike TimeRotor Strike TimeFeeder Strike TimeRotor Strike TimeF				Gravity Mode		
Motor KTY monitoring.Overspeed Governor TestMotor KTY monitoring.Endry Door OpeningExternal trip inputAni-Shall ProtectionControl signal loss detectionTravel CounterCommunications loss fault detectionGovernor CounterMatch K Cooling Fan fault detectionUser customisable Cooling Fan ControlSafe Torque off circuit Error detectionOutput Phase Sequence swap.Encoder Feedback FaultsOutput Phase Sequence swap.Factory Default parameters have been loadedIniversal Encoder module.Facke Release MonitoringEncoder support of regenerative unitsRocher wire break detection.Encoder wire break detection.Madbus comms faultEncoder direction swap.Konder supportEncoder direction swap.Rocher feedback.Encoder direction swap.Encoder fieledback.Encoder direction swap.Rocher strip Governor fielEncoder direction swap.Rocher freedback.Encoder direction swap.Encoder direction swap.Encoder direction swap.Encoder freedback.Encoder direction swap.Encoder direction swap.Encoder direction swap.Encoder freedback.Encoder freedback.Encoder freedback.Encoder freedback. <td></td> <td></td> <td>User Unit Selections</td> <td></td> <td></td>				User Unit Selections		
External trip inputEarly Door OpeningExternal trip inputAnit Stall ProtectionControl signal loss detectionTravel CounterCommunications loss Fault detectionRope-wear CounterHeatsink Cooling Fan fault detectionOutput Phase Sequence swap.Encoder Feedback FaultsOutput Phase Sequence swap.Rotory Default parameters have been loodedOEM Defaults.Brake Release MonitoringEncoder support of regenerative unitsRotors counts fultEncoder support of regenerative unitsRotors Counts fultEncoder support of regenerative unitsBrake Release Monitoring LockoutEncoder supportModbus comms fultEncoder SupportKoodpe counts fultEncoder freedback. Shaft copy, simulated Encoder output.Encoder SupportEncoder relative filtered supportRotory Default parameters have been loodedEncoder freedback.Brake Release Monitoring LockoutEncoder supportModbus comms fultEncoder supportCAN Open comms tripEncoder freedback. Shaft copy, simulated Encoder output.Encoder String TimerEncoder freedback.		Motor PTC monitoring.		Overspeed Governor Test		
Anti-Stall ProtectionControl signal loss detectionFavel CounterCommunications loss Fault detectionRope-wear CounterHeatsink Cooling Fan fault detectionUser custonisable Cooling Fan ControlSafe Torque off circuit Error detectionOutput Phase Sequence swap.Encoder Feedback FaultsOutput Phase Sequence swap.Autotune Error detectionOE Bus connection support of regenerative unitsFactory Default parameters have been loadedViererstaffen module.Brake Release Monitoring LockoutForceder smap.Modbus comms faultForceder streel-time feedback.Konder streel functionForceder streel-time feedback.Brake Release Monitoring LockoutForceder streel-time feedback.Kondpus comms faultForceder streel-time feedback.CAN Open comms tripForceder streel-time feedback.Service TimerIncrementel HIL, TIL single and quadrature type Encoders.		Motor KTY monitoring.		Early Door Opening		
Control signal loss delectionTravel CounterCommunications loss Fault detectionRosewear CounterHotsink Cooling Fan full detectionUer customisable Cooling Fan ControlSafe Torque off circuit Error detectionOutput Phase Sequence swap.Autotune Error detectionOE Rosemention support of regenerative unitsFactory Default parameters have been loadedNiversal Encoder module.Brake Release Monitoring LockoutForoder speerModbus comms faultForoder street-time feedback.Roko Release Monitoring LockoutForoder street-time feedback.Roko Release Monitoring LockoutForoder street-time feedback.Modbus comms faultForoder Street-time feedback.CAN Open comms tripForoder Street-time feedback.Foroder TimerIncrementel HL, TL single and quadrature type Encoders.		External trip input		Anti-Stall Protection		
Communications loss Fault detectionRepervear CounterHeatsink Cooling Fan fault detectionUer customisable Cooling Fan ControlSafe Torque off circuit Error detectionOutput Phase Sequence swap.Facoder Feedback FaultsOE Bus connection support of regenerative unitsAutotune Error detectionOitput Phase Sequence swap.Factory Default parameters have been loadedNiversal Encoder module.Brake Release Monitoring LockoutForoder supportModus comms faultForoder street-line feedback.CAN Open comms tripForoder offset real-line feedback.Service TimerIncrement HIL, TL single and quadrature type Encoders.		Control signal loss detection		Travel Counter		
Heatsink Cooling Fan fault detectionUser customisable Cooling Fan ControlSafe Torque off circuit Error detectionOutput Phase Sequence swap.Encoder Feedback FaultsDe Bus connection support of regenerative unitsAutotine Error detectionOutput Phase Sequence swap.Factory Default parameters have been loadedOutput Phase Sequence swap.Brake Release MonitoringEncoder support of regenerative unitsBrake Release Monitoring LockoutEncoder supportModbus comms faultEncoder supportCAN Open comms tripEncoder offset real-time feedback.Service TimerIncremental HIL, TIL single and quadrature type Encoders.		Communications loss Fault detection				
Safe Torque off circuit Error detectionOutput Phase Sequence swap.Encoder Feedback FaultsDe Bus connection support of regenerative unitsAutoune Error detectionDe Defaults.Factory Default parameters have been loadedDe Moeraults.Brake Release Monitoring LockoutEncoder srapportBrake Release Monitoring LockoutEncoder srapportModbus comms faultEncoder srept real-time feedback.CAN Open comms tripEncoder offset real-time feedback.Service TimerIncremental HIL, TTL single and quadrature type Encoders.		Heatsink Cooling Fan fault detection				
Encoder Feedback FaultsDC Bus connection support of regenerative unitsAutoune Error detectionDC Bus connection support of regenerative unitsFactory Default parameters have been loadedDC Bus connection support of regenerative unitsBrake Release MonitoringDC Bus connection support of regenerative unitsBrake Release Monitoring LockoutEncoder supportModbus comms faultEncoder supportCAN Open comms tripEncoder softser real-time feedback.Bervice TimerIncremental HTI, TTL single and quadrature type Encoders.		Safe Torque off circuit Error detection				
Autotune Error detectionAutotune Error detectionOEM Defaults.Factory Default parameters have been loadedIniversal Encoder module.Brake Release MonitoringFooder surportFooder wire break detection.Brake Release Monitoring LockoutEncoder direction swap.Modbus comms faultFooder offset real-time feedback.CAN Open comms tripEncoder Greetback shaft copy, simulated Encoder output.Bervice TimerIncremental HTI, TTI single and quadrature type Encoders.		Encoder Feedback Faults				
Factory Default parameters have been loaded OEN Defaults. Brake Release Monitoring Brake Release Monitoring Lockout Factory Default parameters have been loaded Brake Release Monitoring Lockout Factory Default parameters have been loaded Factory Default parameters have been loaded Brake Release Monitoring Lockout Factory Default parameters have been loaded Factory Default parameters have been loaded Modbus comms fault Factory Default parameters have been loaded Facoder offset real-time feedback. CAN Open comms trip Facoder offset real-time feedback. Facoder output. Incremental HTL, TTL single and quadrature type Encoders. Incremental HTL, TTL single and quadrature type Encoders.		Autotune Error detection				
Brake Release Monitoring Encoder support Universal Encoder module. Brake Release Monitoring Lockout Encoder wire break detection. Brake Release Monitoring Lockout Encoder direction swap. Modbus comms fault Encoder offset real-time feedback. CAN Open comms trip Encoder shaft copy, simulated Encoder output. Bervice Timer Incremental HTI, TTL single and quadrature type Encoders.				OEM Defaults.		
Brake Release Monitoring Lockout Encoder wire break detection. Brake Release Monitoring Lockout Encoder direction swap. Modbus comms fault Encoder offster real-time feedback. CAN Open comms trip Encoder Geteback shaft copy, simulated Encoder output. Service Timer Incremental HTI, TTL single and quadrature type Encoders.				Universal Encoder module.		
Modbus comms fault Encoder anection swap. CAN Open comms trip Encoder offset real-time feedback. Service Timer Incremental HTL, TTL single and quadrature type Encoders.		-		Encoder wire break detection.		
CAN Open comms trip Encoder Feedback shaft copy, simulated Encoder output. Service Timer Incremental HTL, TTL single and quadrature type Encoders.						
Service Timer Incremental HTL, TTL single and quadrature type Encoders.						
		CAN Open comms trip				
Absolute Encoder support, Endat, SinCos *Biss.		Service Timer				
				Absolute Encoder support, Endat, SinCos *Biss.		





How we measure our drives and packaging

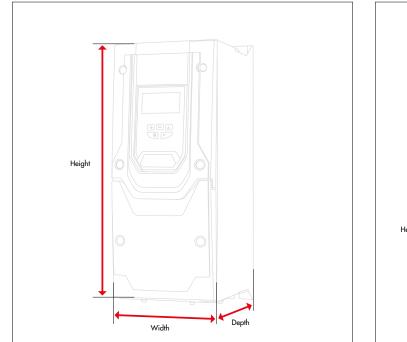



Drive Dimensions

Packaging Dimensions



