



Extract from our online catalogue:

**hps+130/DIU/TC/E/G1**

Current to: 2023-11-13



hps+ in safety gear - When you need chemically resistant, pressure-resistant sensors.

## HIGHLIGHTS

- › Optionally used in normal pressure or overpressure
- › PTFE membrane › for protection against aggressive media
- › Stainless-steel or optional PVDF housing for hps+340 › for use in the food industry
- › Sealed against the housing with an O-ring made from FFKM › for the highest possible chemical resistance
- › Digital display with direct measured value output in mm/cm or %
- › Numeric configuration of the sensor using digital display
- › UL Listed to Canadian and US safety standards

## BASICS

- › 2 switching outputs in pnp variant
- › Analogue output plus 1 pnp switching output
- › 4 detection ranges with a measurement range of 30 mm to 8 m
- › microsonic Teach-in using T1 or T2 buttons
- › 0.025 mm to 2.4 mm resolution
- › Temperature compensation
- › 9–30 V operating voltage
- › LinkControl › for configuration of sensors from a PC

# Description

## For fill level measurements of aggressive media and in overpressure

the ultrasonic transducers of the new hps+ sensors are now fitted out - as standard - with a PTFE film. It is sealed with a FFKM O-ring against the housing made of 1.4571 stainless steel or PVDF. This ensures a high degree of resistance to aggressive media.



*Fill level measurement in tanks*

The hps+ sensors can be used for fill level measurement under normal pressure or in tanks and containers with an overpressure of up to 6 bar. Its special software filters also allow its use in containers filled from above or that have a stirring system.

Pressure-tight installation in a tank is undertaken by means of a 1" threaded flange or a 2" one in the case of hps+340.

## Chemical resistance

and seal tightness were tested through being stored over cellulose thinner and 1,000,000 alternating pressure stresses. Cellulose thinner is extremely corrosive and has a high rate of penetration.



*hps+340 in highly resistant PVDF housing - PTFE protective film sealed with an O-ring made from FFKM against the housing*

Two different output stages are available for four detection ranges:



2 switching outputs in pnp switching technology



1 analogue output with an additional pnp switching output

### The hps+ sensors with switching output have three operating modes:

- › Single switching point
- › Two-way reflective barrier
- › Window mode

### Two three-colour LEDs

always show the current state of the switching outputs or the analogue output.

### With TouchControl

all configuration can be done right at the sensor. The easily legible three-digit LED display continually shows the current distance value and automatically switches between millimetre and centimetre displays.

### Setting a switching or analogue output

can optionally be carried out by numeric input of the desired distance values, or using a Teach-in procedure. This permits the user to select the configuration method preferred. The hps+ sensors support synchronisation and multiplex operation and have extensive parameterisation options via LinkControl.

Further information on how to set up hps+ sensors can be found at [mic+ sensors](#).

### LinkControl


consists of the **LinkControl adapter** and the **LinkControl software** and facilitates the configuration of the hps+ sensors via a PC or laptop with any conventional Windows® operating system.





*Sensor connected to the PC via LCA-2 for programming*

# hps+130/DIU/TC/E/G1

## scale drawing

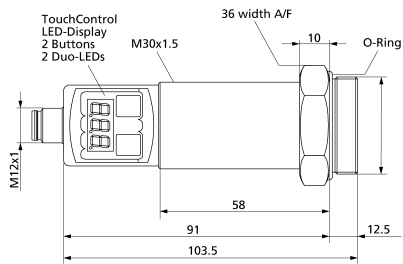

## detection zone

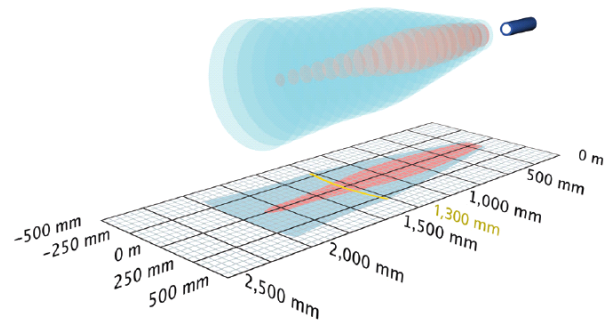

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



### measuring range

200 - 5.000 mm

### design

process connection G1

### operating mode

proximity switch/reflective mode  
reflective barrier  
window mode  
analogue distance measurement

### particularities

pressure-resistant up to 6 bar overpressure  
high chemical resistance  
stainless steel version  
display  
process connection G1

## ultrasonic-specific

### means of measurement

echo propagation time measurement

### transducer frequency

180 kHz

### blind zone

200 mm

### operating range

1,300 mm

### maximum range by normal pressure

2000 mm

### maximum range by $\geq 2$ bar overpressure

5000 mm

### resolution

0.18 mm to 1.5 mm, depending on the analogue window

### reproducibility

$\pm 0.15$  %

### accuracy

$\pm 1$  % (temperature drift internally compensated)

# hps+130/DIU/TC/E/G1

---

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 80 \text{ mA}$
type of connection	5-pin M12 initiator plug

# hps+130/DIU/TC/E/G1

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V, short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{\max} = 200 \text{ mA}$ ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	5 Hz
response time	160 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing


material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	coated with PTFE film, FFKM O-ring
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g

## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	pressure-resistant up to 6 bar overpressure high chemical resistance stainless steel version display process connection G1

# hps+130/DIU/TC/E/G1

## pin assignment

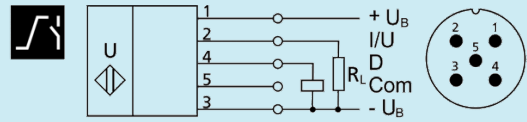

order no.

**hps+130/DIU/TC/E/G1**

The content of this document is subject to technical changes.  
Specifications in this document are presented in a descriptive way  
only. They do not warrant any product features.